



Contract LHDA No.: **2219A**

Contract Name: **Installation of a hydraulically actuated Tresh Rack Cleaning Machine**

Date: **18th December 2025**

Subject: Change of material specification and Minimum requirement for the equipment needed. - Addendum No.2

To: All Bidders


This addendum is issued as part of the Request for Quotations for the above-referenced contract. The changes made through this document may amend, remove or add specific information to the Request for Quotation.

Replace “secondary concrete” (4) of Annexure 9, section 4, as shown below, with “Pagel or approved better grout”.

Remove:

4 ASSEMBLY

4.1 Overview

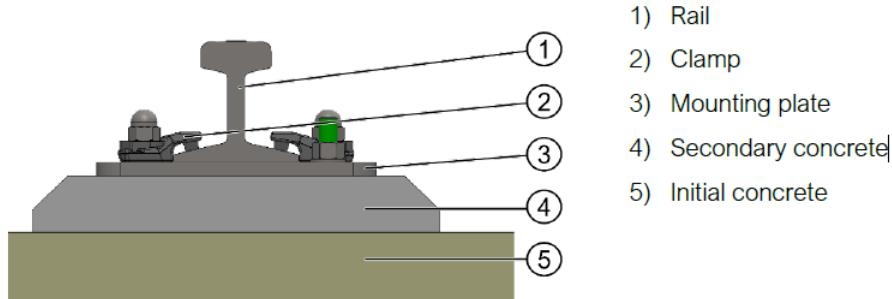




Add:

4 ASSEMBLY

4.1 Overview

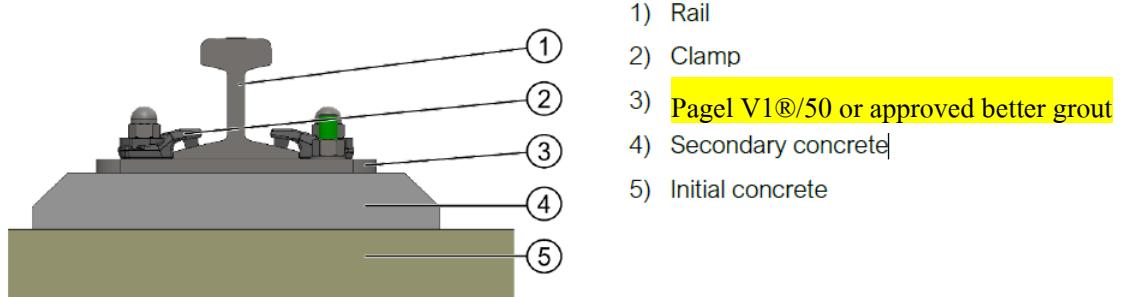

Instead of normal concrete, Pagel V1®/50 grouting shall be used to fill the space between the mounting plate and the initial concrete for the intake roof slab shown above. In cases where the Pagel V1® /50 grout is unavailable, the installation contractor may use the grout of similar or better properties than Pagel V1® /50. In that case, the bidder shall submit the supporting documents detailing the properties and performance of the proposed product for approval by the TRCM Contractor. The compressive strength of the proposed grouting materials shall be no less than 40N/mm² and 80N/mm² at 24 hours and 28 days, respectively. The bidder may also submit the product certification from the manufacturer. (See grouting details, Annexure 14)

Equipment and tools

Refer to section 4 (K) and annexure 14 for the equipment and tools the installation contractor shall provide as a minimum requirement.

All other sections and paragraphs of the subject Request for Quotation remain unchanged.

All bidders are encouraged to check the LHDA website:

<http://www.lhda.org.ls/lhda/tenders/> regularly.